




TECHNICAL DATASHEET

HEALTHCARE TAPWARE

Hospital mixer, fixed or adjustable spout, clip-on - Modul'Mix - 75139

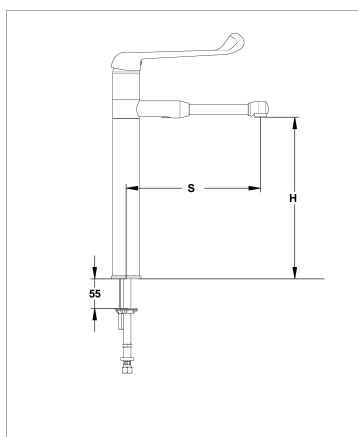

Benefits of the product

- Modul'Mix Range: modularity of parts and adaptability to actual needs
- Retrofitable and customisable
- Ergonomic: easy to use elbow handle (for patients and technical staff)
- Hand hygiene: avoiding manual contact
- Multifunction ceramic cartridge: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Smooth interior tube, fixed or swivel (optional), clip-on spout: easy cleaning and disinfection, limits the formation of biofilm.
- Quick and easy maintenance

Description

Single hole hospital mixer (Modul'mix design), no drain, for hand wash basin, with 170mm long medical handle avoiding manual contact, using elbow, forearm or wrist. Fixed or swivel spout, smooth and clip-on for easy disinfection L 150mm. Height to nozzle 300mm. Height and length of spout adapted without changing the entire tapware. Multifunction ceramic cartridge \varnothing 40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min. Tapware with star-shaped flow straightener eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body, spout and controls in polished chrome plated brass. SPEX stainless steel braided hoses, M10x1 LN G'3 / 8 L 660mm Reinforced fixation by a stainless steel rod. 10 year warranty. Sanifirst brand single hole hospital mixer, fixed or swivel smooth spout, clip-on, for hand wash basin REF: 75139 or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75139
Previous reference	FL6030DC
Brand	Sanifirst
Warranty	10 years against manufacturing defects
Special feature 1	Fixed spout
Special feature 2	Unclipped spout
Special feature 3	Swivel spout
Height to nozzle (mm)	300
Projection (mm)	150
Length of lever (mm)	170
Clip-on spout	Yes
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Elbow / forearm / wrist handle
Connection	SPEX hoses 660 mm - M10 X 1 - LN G'3 / 8 with basket filter seals and flow rate limiters
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75312 Ø 40mm, dual flow, flow limiter and temperature limiter
Coating	Nickel > 10 microns - Chrome > 0.3 microns