



### HEALTHCARE TAPWARE

#### Electronic spout, battery powered, fixed, removable - 75207




#### Benefits of the product

- Modul'Mix Range: modularity of parts and adaptability to actual needs
- Retrofitable and customisable
- Quick and easy maintenance
- Limits bacterial growth (legionella, pseudomonas ...)

#### Description

Monofluid electronic spout, no drain, for ceramic or concrete bench. Smooth tube spout, fixed, removable L 150mm. Height to nozzle 150mm. Infrared cell integrated in the body. Power Supply IP65 with 6V lithium battery. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body and polished chrome-plated brass spout. SPEX stainless steel hoses, M10X1, LN G'3 / 8 L 350mm, filters, solenoid valves and silicon membrane M G'3 / 8. Reinforced fixation by a stainless steel rod. 2 year warranty. Chlorine and thermal shock resistant. Customisable anti-bacteria program (purges, frequency, duration, etc.). Sanifirst brand monofluid battery powered electronic spout, fixed and removable, smooth tube REF: 75207 or approved equivalent.

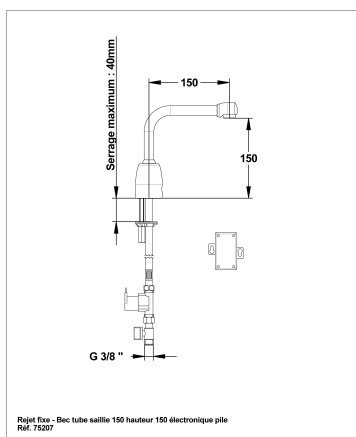



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75207
<b>Previous reference</b>	FL9122MA
<b>Brand</b>	Sanifirst
<b>Warranty</b>	2 years against manufacturing defects
<b>Power supply</b>	Battery powered
<b>Special feature 1</b>	Fixed spout
<b>Special feature 2</b>	Removable spout
<b>Height to nozzle (mm)</b>	150
<b>Projection (mm)</b>	150
<b>Clip-on spout</b>	No
<b>Connection</b>	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Max tightening</b>	40
<b>Coating</b>	Nickel > 10 microns - Chrome > 0.3 microns