




TECHNICAL DATASHEET

HEALTHCARE TAPWARE

Electronic spout, mains powered, fixed, temperature setting - 75210

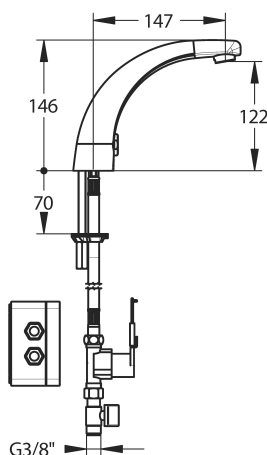

Benefits of the product

- Hygiene: no manual contact.
- Side temperature control with integrated hot water stop limiter.
- Chlorine and thermal shock resistant.
- Star shaped flow straightener: Limits the water spray, no water retention.
- Customisable anti-bacteria program (purges, frequency, duration, etc.). Limits bacterial growth (legionella, pseudomonas ...)

Description

Monofluid electronic single hole spout, no drain, for ceramic top or concrete bench. Fixed cast spout L 146mm. Height to nozzle 124mm. Side temperature control with hot water stop limiter integrated. Infrared cell integrated in the body. Electronic housing independent, mains, IP65, 230V input, 6V output. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks SPEX stainless steel hoses, M10X1, LN G'3 / 8 L 350mm, filters, solenoid valves and silicon membrane M G'3 / 8. Reinforced fixation by a stainless steel rod. 3 year warranty. Chlorine and thermal shock resistant. Customisable anti-bacteria program (purges, frequency, duration, etc.). Sanifirst brand monofluid mains powered electronic spout, fixed and removable, smooth tube REF: 75210 or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75210
Previous reference	FL9212MA
Brand	Sanifirst
Warranty	3 years against manufacturing defects
Power supply	Mains
Special feature 2	Fixed spout
Special feature 4	Tabletop
Height to nozzle (mm)	122
Projection (mm)	147
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Electronic
Connection	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8
Solenoid valve(s) with silicone membrane	2
Minimum pressure	1 bar
Recommended pressure	3 bar
Maximum pressure	5 bar
Max tightening	70
Coating	Nickel > 10 microns - Chrome > 0.3 microns