




HEALTHCARE TAPWARE

Electronic spout, wall-mount, battery powered, swivel, removable, upward - 75226

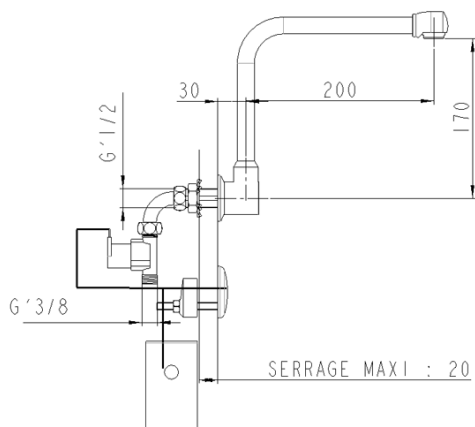

Benefits of the product

- Smooth tube swivel removable spout: easy cleaning and disinfection, limits the formation of biofilm.
- Remote infrared detector: greater freedom of installation.
- Star shaped flow straightener: Limits the water spray, no water retention.
- Customisable anti-bacteria program (purges, frequency, duration, etc.). Limits bacterial growth (legionella, pseudomonas ...)
- Chlorine and thermal shock resistant.

Description

Electronic wall-mount spout without drain. Smooth tube, swivel, removable, upward spout, L 200mm. Height to nozzle 170mm. Remote wall-mount infrared cell. Independent mains electronic housing, IP65, with 6V lithium battery. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks. Smooth body in polished chrome-plated brass. Threaded connection M G' 1 / 2, filters, valves with silicone membrane M G' 3 / 8. 3 year warranty. Chlorine and thermal shock resistant. Customisable anti-bacteria program (purges, frequency, duration, etc.). Sanifirst brand lithium battery powered upward electronic spout, swivel and removable, smooth tube REF: 75226 (formerly FL9421MA) or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75226
Previous reference	FL9421MA
Brand	Sanifirst
Warranty	2 years against manufacturing defects
Power supply	Battery powered
Special feature 2	Swivel spout
Special feature 4	Wall-mounted
Height to nozzle (mm)	170
Lenght of spout (mm)	200
Projection (mm)	230
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Electronic
Connection	M G'1/2
Solenoid valve(s) with silicone membrane	1
Minimum pressure	1 bar
Recommended pressure	3 bar
Maximum pressure	5 bar
Lenght of threaded rod (mm)	56
Max tightening	20
Coating	Nickel > 10 microns - Chrome > 0.3 microns