




### HEALTHCARE TAPWARE

#### Electronic spout, wall-mount, mains powered, fixed, downward - 75231

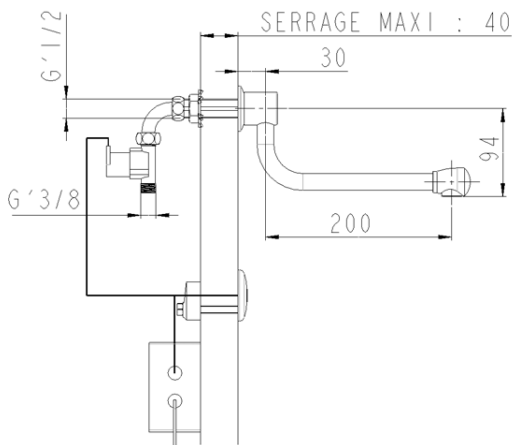


#### Benefits of the product

- Smooth tube spout: limits the deposition of biofilm.
- Remote infrared detector: greater freedom of installation.
- Star shaped flow straightener: Limits the water spray, no water retention.
- Customisable anti-bacteria program (purges, frequency, duration, etc.). Limits bacterial growth (legionella, pseudomonas ...)
- Chlorine and thermal shock resistant.

#### Description

Electronic monofluid wall-mount gooseneck spout. Smooth tube spout, fixed, removable, L 200 mm. Height to nozzle 100mm suitable for end filtration. Electronic housing independent, mains, IP65, 230V input, 6V output. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body and polished chrome-plated brass spout. M1/2 connection on spout and M3 / 8 on solenoid valve, filters, solenoid valves with silicone membrane M G'3 / 8. 2 year warranty. Chlorine and thermal shock resistant. Customisable anti-bacteria program (purges, frequency, duration, etc.). Sanifirst brand electronic upward gooseneck spout, fixed and removable smooth tube REF: 75231 or approved equivalent.

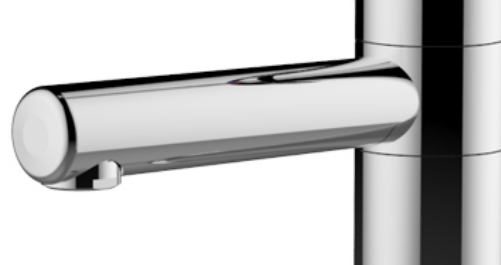

## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75231
<b>Previous reference</b>	FL9610MA
<b>Brand</b>	Sanifirst
<b>Warranty</b>	2 years against manufacturing defects
<b>Power supply</b>	Mains
<b>Special feature 2</b>	Fixed spout
<b>Special feature 4</b>	Wall-mounted
<b>Height to nozzle (mm)</b>	100
<b>Length of spout (mm)</b>	200
<b>Projection (mm)</b>	230
<b>Clip-on spout</b>	No
<b>Flow straightener</b>	Star shaped flow straightener, M24 x 1
<b>Lever</b>	Electronic
<b>Connection</b>	M G'1/2
<b>Solenoid valve(s) with silicone membrane</b>	1
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Length of threaded rod (mm)</b>	56
<b>Max tightening</b>	20
<b>Coating</b>	Nickel > 10 microns - Chrome > 0.3 microns