



### HEALTHCARE TAPWARE

#### Electronic spout, wall-mount, battery powered, swivel, removable, downward - 75234




#### Benefits of the product

- Smooth tube swivel removable spout: easy cleaning and disinfection, limits the formation of biofilm.
- Remote infrared detector: greater freedom of installation.
- Hygiene: no manual contact.
- Star shaped flow straightener: Limits the water spray, no water retention.
- Customisable anti-bacteria program (purges, frequency, duration, etc.). Limits bacterial growth (legionella, pseudomonas ...)

#### Description

Electronic monofluid wall-mount gooseneck spout. Smooth tube spout, swivel, removable, L 200 mm. Height to nozzle 100mm, suitable for end filtration. Power Supply IP65 with 6V lithium battery. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body and polished chrome-plated brass spout. M1/2 connection on spout and M3 / 8 on solenoid valve, filters, solenoid valves with silicone membrane M G'3 / 8. 2 year warranty. Chlorine and thermal shock resistant. Customisable anti-bacteria program (purges, frequency, duration, etc.). Sanifirst brand electronic upward gooseneck spout, swivel and removable smooth tube REF: 75234 or approved equivalent.

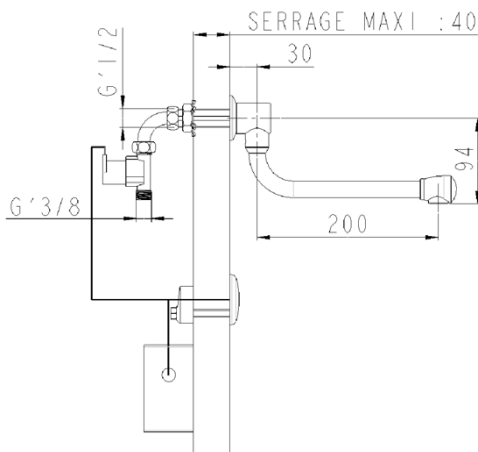



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75234
<b>Previous reference</b>	FL9621MA
<b>Brand</b>	Sanifirst
<b>Warranty</b>	2 years against manufacturing defects
<b>Power supply</b>	Battery powered
<b>Special feature 2</b>	Swivel spout
<b>Special feature 4</b>	Wall-mounted
<b>Height to nozzle (mm)</b>	100
<b>Lenght of spout (mm)</b>	200
<b>Projection (mm)</b>	230
<b>Clip-on spout</b>	No
<b>Flow straightener</b>	Star shaped flow straightener, M24 x 1
<b>Lever</b>	Electronic
<b>Connection</b>	M G'1/2
<b>Solenoid valve(s) with silicone membrane</b>	1
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Lenght of threaded rod (mm)</b>	56
<b>Max tightening</b>	20
<b>Coating</b>	Nickel > 10 microns - Chrome > 0.3 microns