



HEALTHCARE TAPWARE

Thermostatic shower mixer, downward handle and output - Mastermix - 75308



Benefits of the product

- MASTERMIX PATENTED TECHNOLOGY
- No communication between hot and cold water
- No back-flow valve needed
- Cold body: safety insulation
- Temperature and flow controls easily identifiable
- Temperature maintenance and anti-scald insulation
- Quick and easy maintenance
- Swivel and removable upward cast spout

Description



Thermostatic shower mixer MASTERMIX design equipped with ergonomic downward flow control handle.

Temperature knob with stop at 38°, releasable to 45°C

150mm span, off centre M 1/2 fittings with chrome cover plates and filter seals. Shower output M'1 / 2 downward with integrated back-flow valve. Flow adjustable between 5 and 14l/min

Unique patented system avoiding communication between hot and cold water supplies eliminating back-flow valves on mixer supplies using a ceramic cartridge and a thermostatic cartridge NF EN 111.

3-year warranty for the thermostatic cartridge and 10-year warranty for the rest of the fittings. PART NO.: 75308, MASTERMIX design, Sanifirst brand or approved equivalent.

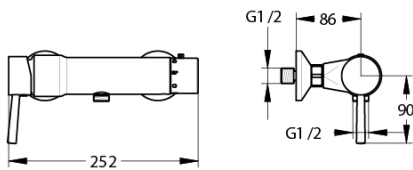



TECHNICAL DATASHEET

Additional Information

Product reference	75308
Previous reference	SF3930AA
Brand	Sanifirst
Warranty	10 years against manufacturing defects / 3 years for the thermostatic cartridge
Special feature 1	Shower
Clip-on spout	No
Lever	Downward opening / closing handle and T ° C brass knob
Connection	LN G'3 / 4 comes with rosettes and off-centre fittings M G'1 / 2 - M G'3 / 4
Flow rate	Estimate: adjustable between 5 and 14l/min
Minimum pressure	1 bar
Recommended pressure	3 bar - avoid pressure differences of more than 1 bar between the hot and cold water supplies
Maximum pressure	5 bar
Cartridge	One thermostat and one ceramic
Coating	Nickel > 10 microns - Chrome > 0.3 microns
Thermal shock	No