




HEALTHCARE TAPWARE

Hospital thermostatic sink mixer, swivel spout, thermal shock - 75632

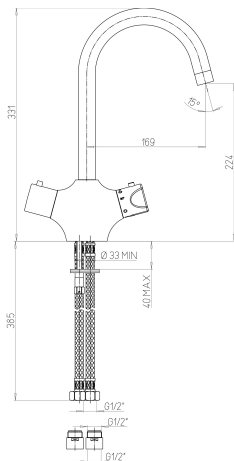

Benefits of the product

- Swivel and removable spout
- Dual flow knob
- Temperature knob locked at 38 °C and 41°C (Secured release only by technical services)
- Flexible, resistant to thermal shocks
- Star shaped flow straightener: Limits the water spray, no water retention.

Description

Thermostatic single hole sink mixer, no drain, for hand wash basin, deck-mount. Swivel and removable cast spout L 169mm. Height to nozzle 224mm. Dual flow control knob and a special heat shock knob locked at 38 °C and 41°C with a secure release system for thermal shock without changing knob and accessible only by technical services. ½ turn ceramic head for flow control and NF Thermostatic cartridge for adjusting the temperature. Tapware fitted as standard star-shaped flow straightener. Body, spout and knobs in polished chrome-plated brass. SPEX stainless steel braided hoses, G'1/2 L 385mm Reinforced fixation by a stainless steel rod. 3-year warranty for the thermostatic cartridge and 10-year warranty for the rest of the fittings. Sanifirst brand single hole sink mixer, swivel, cast spout REF: 75632 or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75632
Previous reference	NC
Brand	Sanifirst
Warranty	10 years against manufacturing defects / 3 years for the thermostatic cartridge
Special feature 1	Sink
Height to nozzle (mm)	224
Projection (mm)	169
Clip-on spout	No
Drainage	Without drainage
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Brass knobs
Connection	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8
Flow rate	
Minimum pressure	1 bar
Recommended pressure	3 bar - avoid pressure differences of more than 1 bar between the hot and cold water supplies
Maximum pressure	5 bar
Cartridge	Thermostatic
Head	Tête céramique 1/2 tour
Thermal shock	Yes