



### LABORATORY TAPWARE

#### Gooseneck swivel spout, right hand side knob - 76010




#### Benefits of the product

Coating: black Rilsan

#### Description

Gooseneck drinking water tap with swivel removable smooth spout for backsplash. Water tight guided valve head NF, threaded connection M G'1 / 2,  $\varnothing$  10 mm removable serrated tip, 250mm projection. Polypropylene brace, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). LHS knobs possible. Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand gooseneck tap with swivel smooth removable spout with RHS knob for backsplash REF: 76010 or approved equivalent.

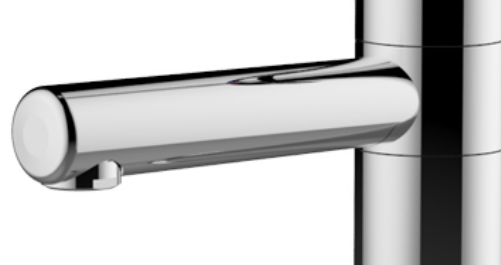

## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76010
<b>Previous reference</b>	H9152PT
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defect
<b>Special feature 1</b>	Direct control tapware
<b>Special feature 2</b>	Backsplash
<b>Special feature 3</b>	Swivel spout
<b>Nozzle 1</b>	Removable connector Ø10 mm
<b>Base color EN</b>	Green
<b>Base washer color EN</b>	Blue
<b>Insert color EN</b>	Blue
<b>Knob color EN</b>	Green
<b>Knob plate color EN</b>	Green
<b>Additional information</b>	LHS knobs possible.
<b>Height to nozzle (mm)</b>	180
<b>Length of spout (mm)</b>	250
<b>Opening mechanism</b>	2.5 turns head
<b>Projection (mm)</b>	273
<b>Connection</b>	Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	55
<b>Packing</b>	1