




### LABORATORY TAPWARE

#### Dual tap at 90 ° - 76229



#### Description

Dual deck-mount safety taps at 90 °, National Education standard, for combustible gases. 1/4 turn ball valve, M G'1/2 output, threaded connection M G'1 / 2, 75mm projection. ABS knobs and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand dual safety tap at 90 ° REF: 76229 (formerly H9429PT 12) or approved equivalent.

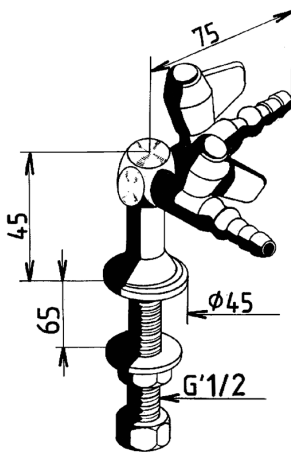



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76229
<b>Previous reference</b>	H9429PT 12
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defects
<b>Special feature 1</b>	Direct control tapware/ National Education
<b>Special feature 2</b>	Tabletop
<b>Special feature 3</b>	With two taps
<b>Special feature 4</b>	With threaded connection
<b>Nozzle 1</b>	M G'1/2
<b>Base color EN</b>	Yellow
<b>Base washer color EN</b>	Yellow
<b>Insert color EN</b>	Yellow
<b>Knob color EN</b>	Yellow
<b>Knob plate color EN</b>	Yellow
<b>Additional information</b>	Tamper-proof
<b>Opening mechanism</b>	1/4 turn head of security
<b>Projection (mm)</b>	75
<b>Connection</b>	Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	27 mbars
<b>Recommended pressure</b>	300 mbar
<b>Maximum pressure</b>	500 mbar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	55
<b>Packing</b>	1