


**Range:** Sensitive simple tap for shower

**Ref:** 27432 - PRESTO DL 400 E-TOUCH

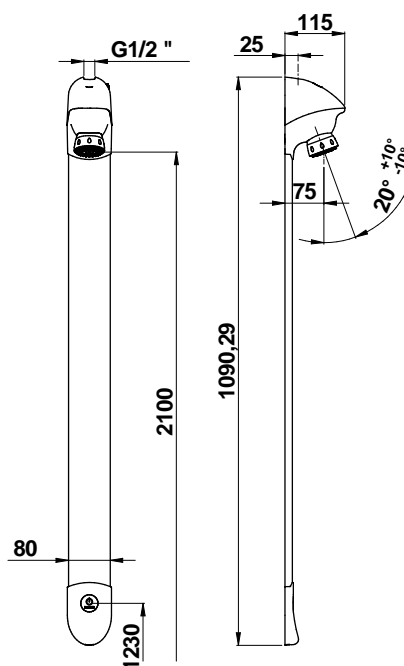

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 6 l/min at 3 bar with integrated flow limiter
- Anti-water-hammering design
- Fixed shower head with anti-limescale spikes

#### > Flow time :

- 30 seconds (Adjustable from 1 sec to 5 min) and Start/Stop function
- Adjustable duration and frequency of the "duty flush" function

#### > Hydraulic supply :

- G 1/2" (15x21) Top water inlet with straight stop valve
- For cold or premixed water

#### > Material and colour finish :

- Injected molded metal body and cover
- Profile extruded in aluminium-magnesium-silicon alloy 6060

#### > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security :

- Anti-blocking system preventing the water to flow continuously

#### > Delivered with :

- VBA screws and nylon plugs
- MF G 1/2" stop valve and filters

#### > Standards & approvals :

- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

