


Range: Timed flow single tap for shower

Ref: 31186 - Cross-partition kit with PRESTO 512 S® - 1 to 140mm

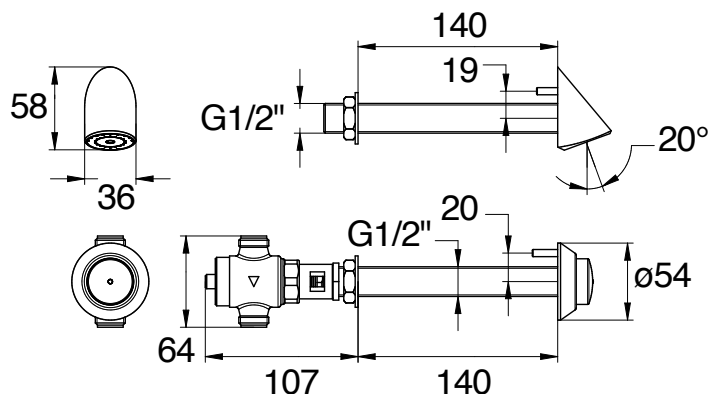

> Working pressure :

- 1 to 5 bar

> Flow :

- 6 l/min at 3 bar - Adjustable in 4 positions
- Anti-water-hammering design

> Flow time :

- 20 seconds (+/-5 seconds)

> Hydraulic supply:

- Inlet M G 1/2" (15x21) - Hot or premixed water

> Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Anti-rotation and anti-vandal control knob
- Anti-rotation fixed shower head

> Delivered with:

- 1 Cross-partition control - 140mm
- 1 Tap P 512 S® for shower
- 1 Fixed Shower head
- 1 Instruction Manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

