


**Range:** Knee operated taps for washbasin  
**Ref:** 31683 - PRESTO 712 Knee operated tap

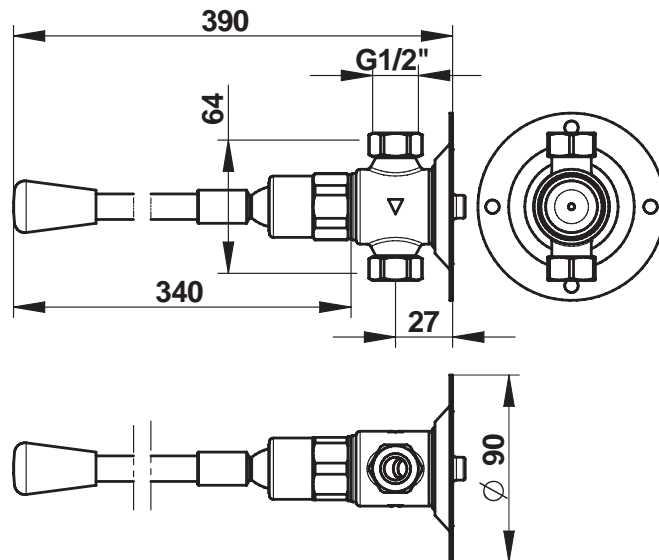

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 6 l/min at 3 bar - 4-positions flow adjustment device
- Anti-water-hammering design

#### > Flow time :

- 15 seconds (± 5 sec.)

#### > Operation :

- Knee operated through action on the omnidirectional control (flexible trigger)

#### > Hydraulic supply :

- Either with hot, cold or mixed temperature water. MG ½ (15x21) Inlet and outlet

#### > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security :

- Non-removable, wear-proof red or blue marker

#### > Delivered with :

- 1 Gasket nut
- 1 Coupling nut
- Instruction manual

#### > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Acoustic class II

