


**Range:** Timed flow tap ware for shower

**Ref:** 35172 - PRESTO ALPA S - READY TO INSTALL WITH FIXED SHOWER HEAD

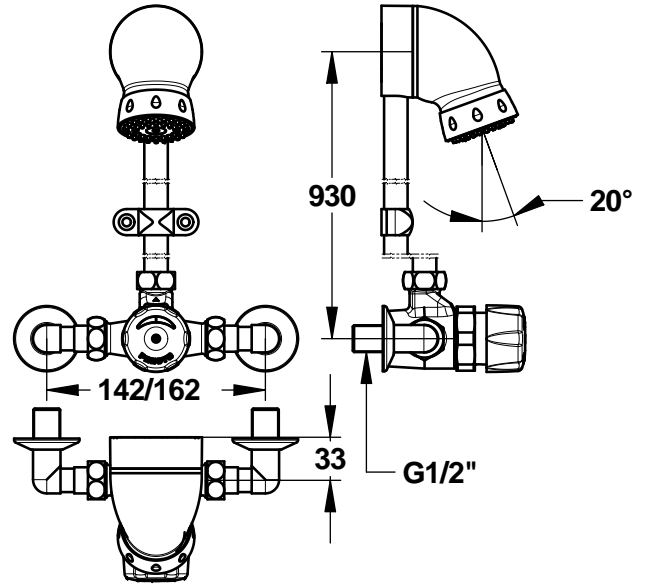

**> Working pressure :**

- 1 to 5 bar

**> Flow :**

- 6 l/min with integrated flow limiter
- Anti-water-hammering design

**> Flow time :**

- 30 seconds (- 10 / + 5 seconds)

**> Hydraulic supply :**

- Angled connectors F 3/4" (20x27) x M 1/2" (15x21)
- Sur mitigeur ALPA S® avec clapets anti-retour NF

**> Material and colour finish :**

- Chrome-plated knob

**> Thermal resistance :**

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

**> Security :**

- Adjustable tamper-proof temperature limiter
- Systeme S® interdisant le blocage en écoulement continu

**> Delivered with :**

- 1 shower head with anti-limescale spikes with tube and sleeve clamp
- 2 Filter gaskets
- 2 Union nuts 3/4" (20x27)
- 2 Angled connectors M 3/4" - F 1/2"

**> Standards & approvals :**

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

