


Range: PRESTORIZON - Range of Wall-Mounted Sensor Taps

Ref: 52038 - PRESTORIZON Cross-wall mixer sensor tap

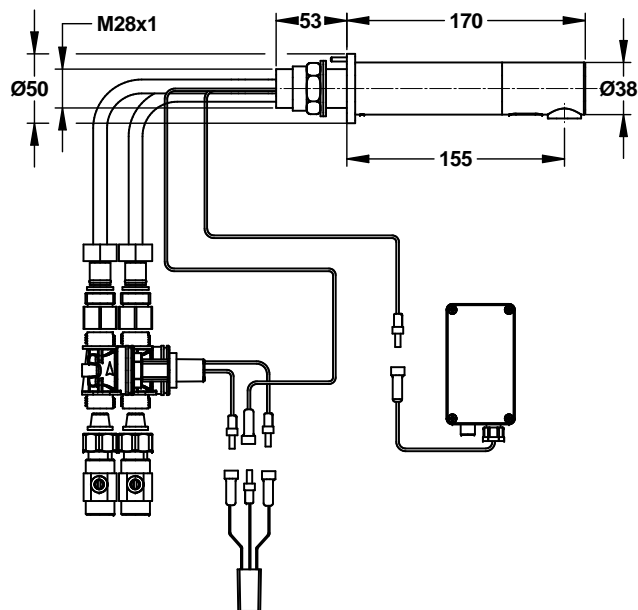

> Working pressure :

- 1 to 5 bar

> Flow :

- 3 l/min with integrated flow regulator
- High quality anti-limescale aerator
- Anti-water-hammering design

> Hydraulic supply :

- G 1/2" (15x21)
- 2 1/2" remote solenoids

> Power supply :

- 9V Lithium battery in IP67 waterproof case

> Material and colour finish :

- Body in brass with a nickel-chrome treatment
- Length of the spout: 170 mm
- Projection: 155 mm
- Diameter: 38 mm
- Wall thickness: 0-40 mm

> Thermal resistance :

- Resistant to a temperature of 65°C for 30 minute thermal shocks

> Security :

- Anti-overflow security time is set to 30 seconds
- Autoflush: 45 sec every 24 hours after last use

> Delivered with :

- 1 Brass clamping nut, 1 Gasket and 1 Washer
- 1 wall fixing rose
- 2 PEX Hoses with G1/2" revolving nuts
- 2 check valves
- 2 stop valves and 2 Filter gaskets
- 1 Self-adhesive sticker and 1 Instruction manual

> Standards & approvals :

- ACS
- CE

> CAUTION:

- For proper operation, avoid installing the product facing reflective surfaces
- Do not use metal basin drain
- Install the product at 30 cm minimum from the basin bottom
- The product is delivered with the parameters mentioned in the technical data sheet. It is possible to modify these parameters with the remote control (ref. 90071)

