


Range: PRESTORIZON - Range of Wall-Mounted Sensor Taps

Ref: 52040 - PRESTORIZON single cross-wall sensor tap

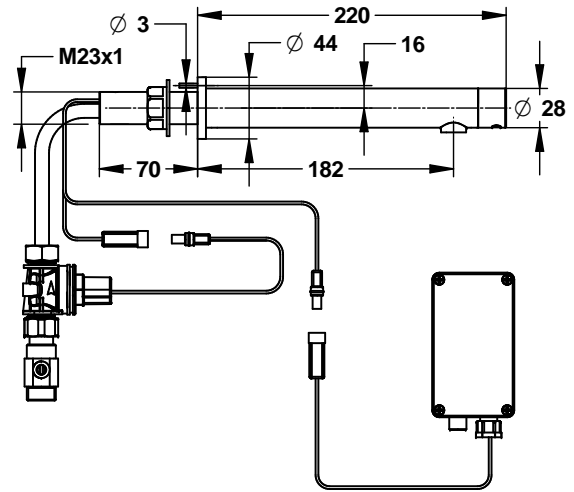

> Working pressure :

- 1 to 5 bar

> Flow :

- 3 l/min with integrated flow regulator
- High quality anti-limescale aerator
- Anti-water-hammering design

> Hydraulic supply :

- G 1/2" (15x21)
- 1 1/2" remote solenoid

> Power supply :

- 9V Lithium battery in IP67 waterproof case

> Material and colour finish :

- Body in brass with a nickel-chrome treatment
- Length of the spout: 220 mm
- Projection: 183 mm
- Diameter: 28 mm
- Wall thickness: 0-60 mm

> Thermal resistance :

- Resistant to a temperature of 65°C for 30 minute thermal shocks

> Security :

- Anti-overflow security time is set to 30 seconds
- Autoflush: 45 sec every 24 hours after last use

> Delivered with :

- 1 Brass clamping nut, 1 Gasket and 1 Washer
- 1 wall fixing rose
- 1 PEX Hose with G1/2" revolving nut
- 1 stop valve and 1 Filter gasket
- 1 Self-adhesive sticker and 1 Instruction manual

> Standards & approvals :

- ACS
- CE

> CAUTION:

- For proper operation, avoid installing the product facing reflective surfaces
- Do not use metal basin drain
- Install the product at 30 cm minimum from the basin bottom
- The product is delivered with the parameters mentioned in the technical data sheet. It is possible to modify these parameters with the remote control (ref. 90071)

Ce document n'est pas contractuel; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

