
# **TECHNICAL DATA SHEET**




Range: PRESTO NOVA®

Ref: 55385 - Deck-mounted sensor mixer, 3l/min, battery, without stop valve



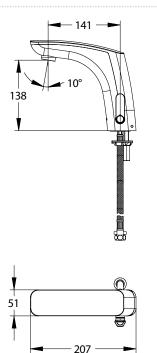



#### > Working pressure:

• 1 to 5 bar

### > Function:

- Starts and stops automatically by hand detection
  Sensor trigger suitable for PRM, elderly, children and disabled people

• 3l/min at 3 bar with integrated regulated anti-limescale aerator

## > Hydraulic supply:

• F G 3/8" (12x17) hoses

# > Power supply:

• Integrated 6V CRP2 lithium battery in a waterproof case

### > Material and colour finish:

- Injected molded metal bodyChrome plated cover

### > Thermal resistance :

• Resistant to a temperature of 75°C for 30 minute thermal shocks

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
  Automatic shutdown of solenoid valve in case of low battery or sensor damage
  Duty flush 30 sec every 24h after last use (adjustable flow time and frequency with PRESTOCOM)
  Low battery alert (blinking led light)
  Maximum temperature limitation with adjustable temperature stop

# > Delivered with:

- 1 Brass clamping nut
  1 Gasket and 1 Washer
  2 PEX Hoses with revolving nuts and NF check valves
  2 Filter gaskets
  1 Self-adhesive sticker
  Instruction manual

### > Standards & approvals :

- Brass in accordance with EN1982, EN12164, EN12165
  200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227





















