
TECHNICAL DATA SHEET



Range: SENSOR URINAL FLUSH VALVE

Ref: 55438 - Concealed PRESTO SENSAO 8500N Urinal sensor flush valve - Battery operated



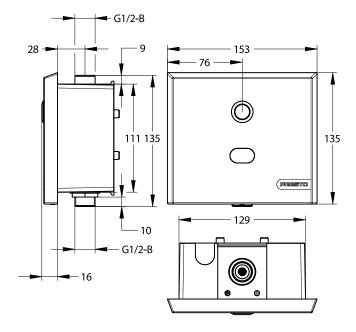

> Working pressure :

1 to 5 bar

> Flow :

- Pre-setting 0,15l/s integrated flow regulator (for common urinal bowls)
 0,30l/s at 3 bar by removing the flow regulator (for siphonic urinal bowls).

> Flow duration :

6 seconds
Factory pre-setting flush program can be adjusted via PRESTO programming tool (pre-rinse, flow duration, periodical flush et its flow duration)

> Operation :

- Automatic flush by optoelectronic detection
 Manual over-ride button
- > Hydraulic supply :
- Built-in M G 1/2" (15x21) in-line inlet/outlet water

> Power supply :

· With integrated 6 V CRP2 lithium battery type in a waterproof case

> Material and colour finish :

Anti-vandal stainless steel grade 304L front cover with brushed finish
 Body in brass

> Security :

- The solenoid valve will be closed automatically in case of low battery or any damage of detector
 Automatic rinse every 24H after the last usage
- > Delivered with :

 - 1 concealed box
 Washers
 Wall dowels and mounting screws
 1 integrated stop valve
 Instruction manual
- > Standards & approvals :
 - Compliant with CE directive EN61000-6-1, EN61000-6-3, DBT 73/23/CEE, 2002/95/CE

CE

