
TECHNICAL DATA SHEET



Range: Concealed sensor flush valve

Ref: 55478 - PRESTO 7200 XL N, battery power, black matte finishing



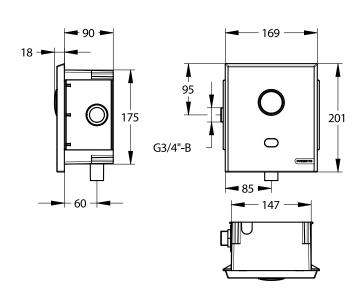

> Working pressure :

1 to 5 bar

- > Volume of water delivered (adjustable on request through PRESTO setting tool):

 - Small volume: 41 (+/- 11) Adjustable from 2 to 61 at 2.5 bar
 Large volume: 61 (+/- 11) Adjustable from 4 to 91 at 2.5 bar
 Volume preset at +/- 1,51 on pressure range from 1,2 to 4 bar
 Anti-water-hammering device
 Automatic 11/s flow limiter, from 1.2 to 4 bar dynamic working pressure

> Operation :

- Double flush volume automatic detection depending on the time of user presence (4/6I short/long detection)
 By pass manual 6I push button (flush can be activated in case of power failure)
- > Power supply : · With integrated 6V-CRP2 lithium battery type in water-proof casing
- > Hydraulic supply :
 - On PRESTO 1000 XL tap with 3/4" (20x27) integrated stop valve
 Outlet connection on flush pipe Ø 28 mm

> Material and colour finish :

Bright brass body and stop valve
Anti-vandal stainless steel front plate with matte black coating and pink gold PVD button

> Security :

- Vacuum breaker device prevents the contamination of the water network from polluted water backflow
 Patented anti-blocking "S" system to avoid the water to flow continuously
 Solenoid valve will be automatically closed in case of low battery or any detector damage.

- > Delivered with :

 - 1 concealed box
 1 integrated stop valve
 Instruction manual

> Standards & approvals :

Brass body in accordance with EN 1982, EN 12164, EN 12165
200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227



