


**Range:** Single wall-mounted tap - PRESTOGREEN RANGE

**Ref:** 63212 - PRESTO 504 with 150mm projection - 7 sec timed flow

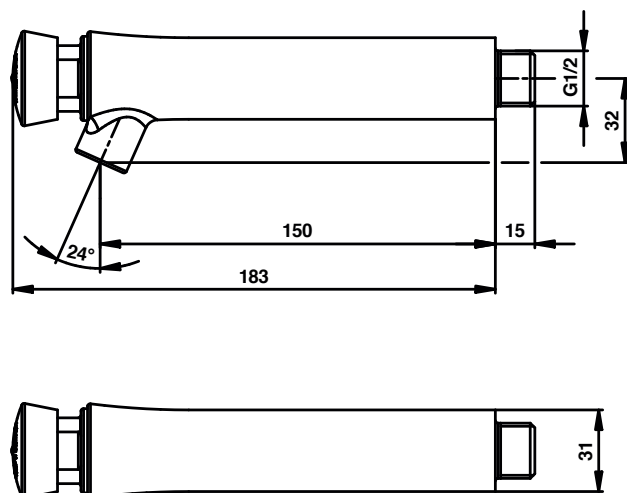

#### > Working pressure:

- 1 to 5 bar

#### > Flow:

- 3 l/min at 3 bar - 4-position flow adjustment device
- Anti-water-hammering design

#### > Flow time:

- 7 seconds

#### > Hydraulic supply:

- M G 1/2" (15x21) - Cold water

#### > Thermal resistance:

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security:

- Interchangeable head and anti-rotation push-button
- Non-removable, wear-proof coloured marker

#### > Dimensions:

- 150mm projection

#### > Delivered with:

- Instruction manual

#### > Standards & approvals:

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

