


**Range:** Single wall-mounted tap - PRESTOGREEN RANGE

**Ref:** 63224 - PRESTO 504S with 150mm projection – 1,9L/min flow rate

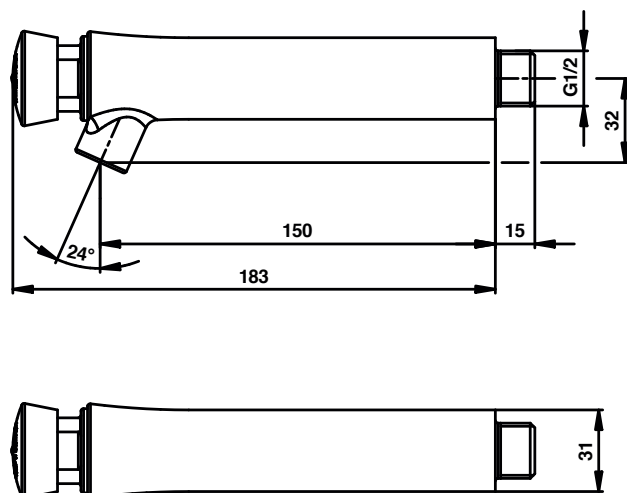

#### > Working pressure:

- 1 to 5 bar

#### > Flow:

- 1,9 l/min
- Anti-water-hammering design

#### > Flow time:

- 15 seconds (± 5 sec.)

#### > Hydraulic supply:

- M G 1/2" (15x21) - Cold water

#### > Thermal resistance:

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security:

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Interchangeable head and anti-rotation push-button
- Non-removable, wear-proof coloured marker

#### > Dimensions:

- 150mm projection

#### > Delivered with:

- Instruction manual

#### > Standards & approvals:

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

