
TECHNICAL DATA SHEET

PRESTO®

Range: Washbasin single self-closing tap

Ref: 64707 - PRESTO NEO DUO S® wall-mounted - Single timed-flow



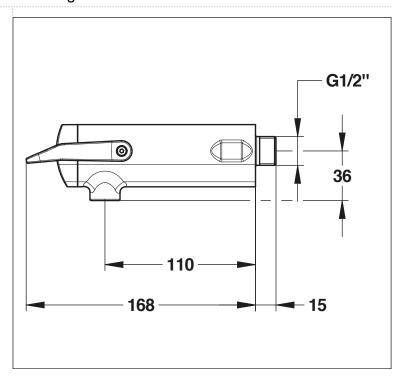

> Working pressure:

• 1 to 5 bar

> Flow:

- 3 l/min at 3 bar 4 position-setting
- Anti water-hammer system

> Flow time:

• 15 seconds - lever upwards or downwards

> Hydraulic supply:

• G 1/2" x 15

> Thermal resistance:

• This tap can withstand a thermal shock of 75°C for 30 minutes as part of a thermal shock programme

> Safety:

• With S® antiblocking system to prevent blocking in continuous flow

> Convenience:

- Soft-touch
 Two-coloured ergonomic lever, in glass fiber reinforced polymer

> Delivered with:

- 1 Filter gasket
- 1 coloured sticker

> Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN12164 / NF EN12165
 Nickel-Chrome surface treatment compliant with NF EN12540
 Neutral Salt Spray (NSS) resistant: 200 h according to NF ISO 9227

















