


**Range:** PRESTO CHEF - Professionnal Kitchen range  
**Ref:** 70814 - Wall-mounted column with 2 holes– rinsing head

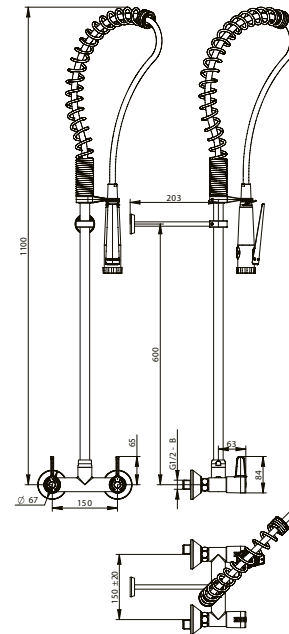

## > THE PRODUCT BENEFITS

- Resistant to intensive use
- Spring flexibility
- Ergonomic hand shower with continuous flow function, and gripping surface limiting the risk of burns. Tip to absorb shocks. Locking hook to avoid MSDs (musculoskeletal disorders)
- Reinforced body / column interface
- Intuitive and ergonomic knobs: easy grip
- Product design
- Wall version: facilitates cleaning and promotes optimal hygiene
- Adjustable wall support
- PU sheath shower hose to avoid bacterial niches and facilitate cleaning
- Easy maintenance: presence of a slot under the red / blue patch allowing the passage of a screwdriver
- Ease of maintenance: availability of all spare parts

## > TECHNICAL SPECIFICATIONS

### > Model:

- 1/4 turn ceramic head mixer
- Black M 1/2" hand shower with grip surface limiting the risk of burns
- Shower flow regulated at 12L / min. User adjustable jet: concentrated or wetting. Anti-scale shower head. Locking hook for continuous flow. Integrated non-return valve.
- Guide spring for stainless steel hose
- Adjustable wall support, can be cut from 60 to 200 mm (from column to wall)
- Adjustable hand shower holder: left or right

### > Recommended working pressure:

- 1 to 5 bars

### > Shower flow:

- 12L /min at 3 bar

### > Hydraulic supply:

- G 1/2" (15x 21)

### > Material and color of finish:

- Body and column in chromed brass
- Injected metal hook
- Material compliant with the "UBA" list

### > Thermal resistance :

- Withstands a temperature of 75 ° C for 30 minutes (as part of thermal shock).

### > Delivered with :

- Eccentric rosettes
- 1 filter
- 1 stainless steel braided hose (hand shower) Lg 1m surrounded by a PU sheath, resistant to temperatures up to 90 ° C. Continuous operating temperature at 70 ° C maximum

### > Standards and approvals:

- Chromed brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
- Nickel-Chrome surface treatment according to NF EN12540
- Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227

