
TECHNICAL DATA SHEET



Range: PRESTO CHEF - Professionnal Kitchen range

Ref: 70832 - Special 'Under Counter 'Bar- Deck-mounted mixer tap



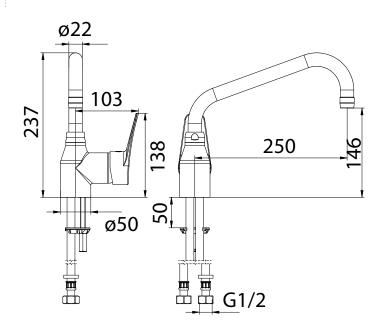

> THE PRODUCT BENEFITS

- Special "Bar" application:
 the spout is hidden under the counter: more aesthetic
 offset of the joystick on the side: easy access for washing
 Resistant to intensive use
 Reinforced body / spout interface with double sliding bearings: no play and high endurance
 Robust spout: Ø 22 mm thickness 1.5mm
 Ergonomic and robust control: easy grip
 Harianes spout with smooth interior

- Hygiene: spout with smooth interiorProduct design

- Ease of cleaningEase of maintenance: availability of all spare parts
- Flow straigntener to channel water and avoid lateral water splashes

> TECHNICAL SPECIFICATIONS > Model:

- $\bullet\,$ 360 $^{\circ}$ swivel spout 250 mm projection. Height under spout 146 mm diameter 22 mm
- Spout thickness: 1.5 mm
 Ceramic cartridge with flow 25 L / min at 38°C at 3 bar
 Interchangeable anti-tartar flow straightener

> Recommended working pressure:

1 to 5 bars

> Flow rate:

• 25L / min at 38°C at 3 bar

> Hydraulic supply:

• G 1/2 " (15x 21)

> Material and color of finish:

- Chromed brass body and spoutMaterial compliant with the "UBA" list

> Thermal resistance :

Withstands a temperature of 75 ° C for 30 minutes (in the context of thermal shock).

> Delivered with:

- 1 fixing bracket
 2 PEX flexible hoses with stainless steel braided nut G1 / 2 " Lg 660 mm with non-return valves NF
 2 filters

· Possibility of adding an extension sold separately, facilitating the passage of large containers

> Standards and approvals:

- Chromed brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
 Nickel-Chrome surface treatment according to NF EN12540
 Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227











