


**Range:** Sanifirst - Healthcare taps

**Ref:** 75638 - Hospital thermostatic shower mixer

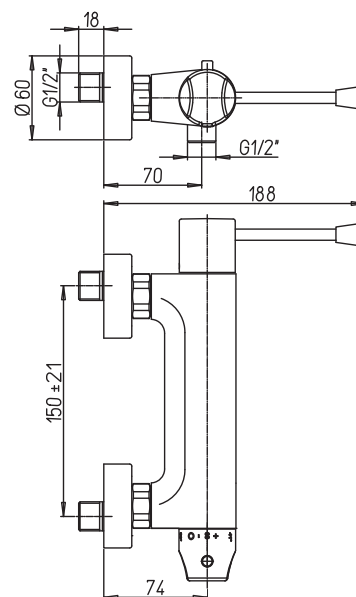

## > Benefits of the products

- Ergonomics: easy grip of the long control
- Anti-scalding safety device for the thermostatic cartridge, conforms to NF EN 1111: water flow stops in the event of a cold water supply cut
- Knob with temperature secured at 38 °
- Flexibility and comfort: possibility of going up to 48 ° C by deliberately pressing the button
- Cold body

## > Model

- Thermostatic shower mixer, wall-mounted, center distance 150 mm
- Rotating knob for temperature adjustment, with temperature stop at 38 ° C. Possibility of going up to 48 ° C.
- Long command for opening / closing the water
- Thermostatic cartridge conforming to NF EN 1111 for temperature regulation
- 1/4 turn ceramic head for flow rate adjustment

## > Flow rate

- 14.4 L / min at 3 bar

## > Recommended pressure

- 3 bar - avoid pressure differences greater than 1 bar between DHW and DCW
- Minimum pressure: 1 bar.
- Maximum pressure: 5 bar

## > Materials

- Body and maneuvering knobs in chromed brass.

## > Connection

- Pair of sheet metal rosette and eccentric connection G'1 / 2 G'3 / 4 and filter gaskets.
- DCW/DHW inlet equipped with check valve, M'1 / 2 shower outlet

## > Warranty

- 10 years against any manufacturing defect.
- 3 years for the thermostatic cartridge