


Range: Sanifirst - Healthcare taps

Ref: 75639 - Hospital thermostatic shower mixer, thermal shock

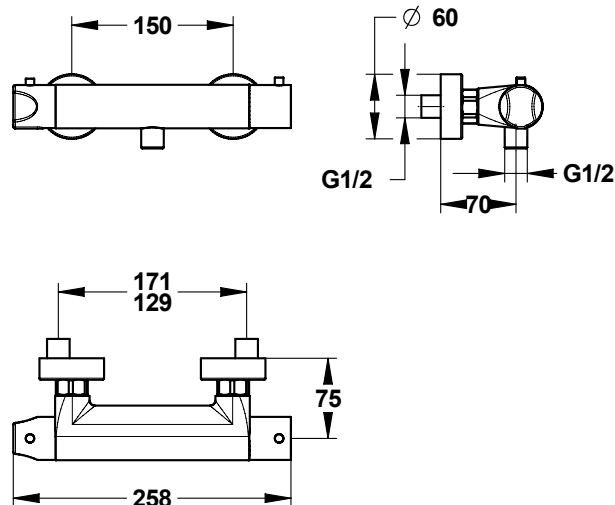

> Benefits of the product

- Anti-scalding safety device for the thermostatic cartridge, conforms to NF EN 1111: water flow stops in the event of a cold water supply cut
- Double flow knob: with limiter that can be unlocked at halfway
- Thermal shock knob blocked at 38 ° / 41 ° C (2 stops), unlockable only by technical services
- Flexible thermal shock resistant
- Cold body

> Anti-scalding safety

- Temperature knob with temperature limiter at 38 ° C and 41 ° C. Unlocking secured for thermal shock and accessible only by technical services without removing the knob.
- Thermostatic cartridge conforming to NF EN 1111 for temperature regulation.

> Flow rate

- Flow rate at 3 bar: 14.4 L / min
- 1/2 turn ceramic head for flow rate adjustment

> Recommended pressure

- 3 bar - avoid pressure differences greater than 1 bar between DHW and DCW
- Minimum pressure: 1 bar
- Maximum pressure: 5 bar

> Materials

- Chromed brass

> Connection

- captive nut G'3 / 4 supplied with rosettes and eccentric fittings M G'1 / 2 - M G'3 / 4. Filter seals.
- 150 mm span

> Warranty

- 10 years against any manufacturing defect
- 3 years for the thermostatic cartridge