TECHNICAL DATA SHEET





_sanifirst

Range: Sanifirst - Healthcare taps

Ref: 75712 - MASTERMIX thermostatic washbasin one-hole mixer-Deck-mounted without drainage



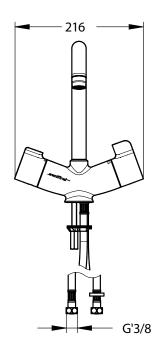



> Benefits of the product

- French norm "NF Medical" certified E.C.A.U.M: E00 Ch2 A3 U3
 MASTERMIX PATENTED RANGE
 Ingenious combination of a ceramic cartridge and thermostatic cartridge: safety and reliability.
 No cross-connection between hot water and cold water.
 Without check-valves
 Body with smooth interior: limits the risk of bacterial proliferation
 Dual safety temperature limiter (38°C and 41°C) and adjustement of maximum flow limiter
 Temperature stability and anti-scalding safety
 Quick and easy Installation and maintenance.
 Safe thermal shock: only accessible by technical staff

> Anti-scalding safety

• Temperature knob with double temperature limiter at 38 ° C and 41 ° C. Unlocking secured for thermal shock and accessible only by technical services without removing the knob.

> Anti-bacterial proliferation safety

• Unique DCW AND DHW anti-intercommunication system, produced by the association of a specific ceramic cartridge and a thermostatic cartridge conforming to NF EN 1111.

> Model

- Deck mounted basin mixer, without waste
 Height under spout: 191 mm
 Projection: 125 mm Swivel spout
 Ceramic cartridge and thermostatic cartridge conforming to NF EN 1111

> Flow rate

- Factory set at 6 L / min.
 Maximum flow rate adjustable to 6 9 12 L / min by the manager.

> Recommended pressure

- 3 bar avoid pressure differences greater than 1 bar between DHW and DCW.
- Minimum pressure: 1 bar.
 Maximum pressure: 5 bar.

> Materials

- Knobs in chromed Zamak.Forged brass body.

> Connection

• Flexible M10x1 captive nut G'3 / 8 Lg 360 mm, and filter seal

> Warranty

- 10 years against any manufacturing defect.
 3 years for the thermostatic cartridge.









