


**Range:** PRESTOTEM 2

**Ref:** 88868 - Shower panel with TOUCH® and standard thermostatic mixer tap - Fixed shower head

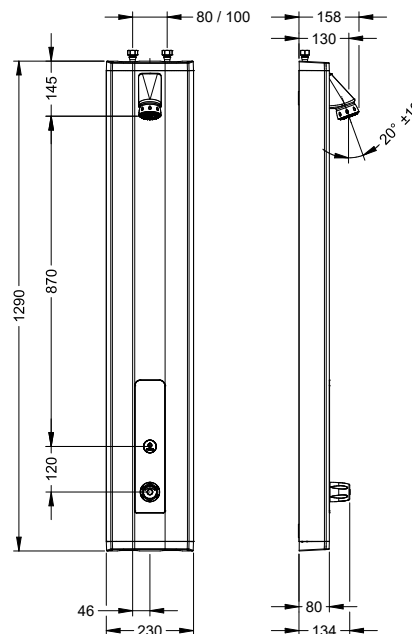

#### > Working pressure :

- 1 to 5 bar

#### > Flow rate:

- 6l/min with integrated flow limiter
- Anti-water-hammering device
- Fixed shower head with anti-limescale spikes

#### > Flow time:

- 30 seconds (adjustable from 1 sec to 5 min) and Start/Stop function
- Adjustable duration and frequency of the "duty flush" function

#### > Hydraulic supply :

- G 1/2" (15x21), top or rear water inlet. For rear water inlet, we recommend to add the adaptation kit under the reference 91026.
- PRESTO TOUCH® tapware and EN 1111 thermostatic mixer tap (NF check valves)

#### > Power supply:

- 6 V Lithium battery type CRP2 in a case integrated inside the panel

#### > Material :

- Anodised aluminium extruded section (2.5mm thickness)
- Aluminium removable valve plate, painted RAL 7005 colour
- High resistance RAL 7005 coloured ABS covers

#### > Functioning:

- Wide opening panel without the need to dismantle from the wall and shower taps on a removable valve plate.

#### > Thermal resistance :

- Resistant to a temperature of 70°C during 30 minutes (for 20 cycles) in case of thermal shocks

#### > Security :

- ANTI-SCALDING SAFETY : flow is immediately stopped if the cold water or hot water is cut off, compliant to French norm EN1111. Integrated temperature switch limiter, pre-fixed 38°C maximum.
- Possibility to parameter the periodical flushing in term of frequency or flow time, limiting bacterium growth.
- The solenoid valve closes automatically if the battery runs out or the sensor is damaged

#### > Delivered with:

- 1/2" hoses with revolving nuts
- MM 1/2" (15x21) straight stop valves and 250 micron filters
- Fastening screws
- Instruction manual

#### > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

