


**Range:** PRESTOTEM 2

**Ref:** 88882 - Sensor shower panel, single-tap, fixed shower head, mains

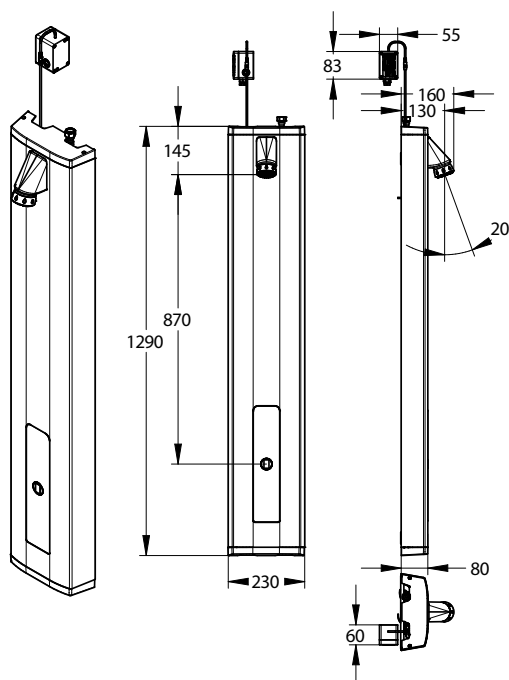

## > Working pressure:

- 1 to 5 bar

## > Flow:

- 6l/min at 3 bar with integrated flow regulator
- Anti-water-hammering design
- Fixed shower head with orientable shower jet and anti-limescale spikes

## > Operation:

- Hygienic electronic detection cell suitable for elderly and disabled people
- Detection range of the hand in front of the cell : 10 cm
- Wide opening panel without dismantling the product and shower valves on removable valve plate

## > Flow time:

- 30 seconds - Adjustable through PRESTOCOM
- Start / Stop function. Stop not possible during the first 10 seconds - Adjustable through PRESTOCOM
- Adjustable duration and frequency of duty flush function through PRESTOCOM

## > Hydraulic supply:

- G 1/2" (15x21), top water inlet. For rear water inlet, add the adaptation kit 91026.
- Single tap for cold or pre-mixed water

## > Power supply:

- 220 V / 7 V mains power supply (transformer provided) with 3 meters extension cord for ceiling connection

## > Material and finish

- Anodised aluminium extruded section (2.5mm thickness)
- Aluminium removable valve plate, painted RAL 7005 colour
- High resistance RAL 7005 coloured ABS covers

## > Thermal resistance :

- Resistant to a temperature of 75°C during 30 minutes (for 20 cycles) in case of thermal shocks

## > Security :

- Automatic shutdown of solenoid valve in case of power failure or sensor damage
- Pre-set 30 seconds duty-flush every 24 hours after the last use to avoid growth of bacteria (legionella, pseudomonas ...) adjustable through PRESTOCOM : [http://www.prestodatashare.com/espacedoc/Notes\\_Annexes/Documents/Q5347.pdf](http://www.prestodatashare.com/espacedoc/Notes_Annexes/Documents/Q5347.pdf)

## > Delivered with:

- 1/2" (15x21) hoses with revolving nuts
- MM 1/2" (15x21) straight stop valves and 250 micron filters
- Fastening screws
- Transformer 220VAC/7VDC
- 3 meters extension cord
- Sensor detection sticker
- Instruction manual

## > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

