


**Range:** Safety Thermostatic Mixing Valve

**Ref:** 29003 - Thermostatic mixing valve with disconnectable temperature control

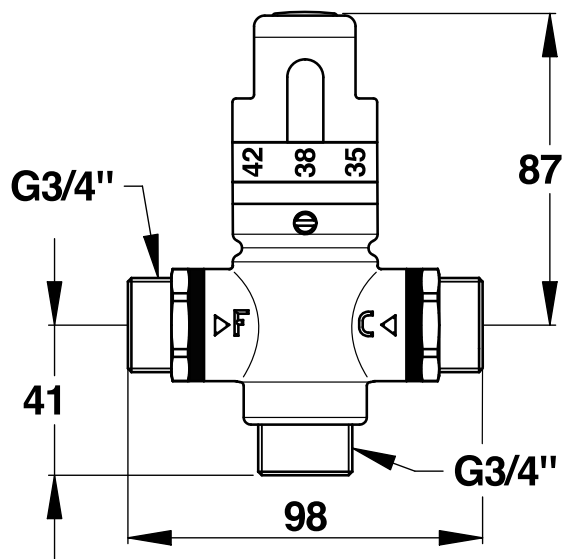

#### > Flow :

- Maximum : 43 l/min à 3 bars
- Minimum : 5 l/min at 3 bar

#### > Temperature :

- Temperature settings : 30 to 60°C
- Maximum hot temperature : 80°C max
- Minimum differential temperature : 15°C (between hot water inlet and pre-mixed water outlet)
- Temperature stability (nominal) : +/- 2°C

#### > Hydraulic supply :

- G 3/4" Inlet and outlet
- Coloured rings – Red ring for hot water and blue ring for cold water

#### > Thermal resistance :

- Designed to sustain temperatures of up to 75°C for 30-minute-thermal-shocks

#### > Security :

- Anti-scald security: hot water is instantly shut-off if the cold water is cut-off
- Internal temperature limiter at 38°C

#### > Delivered with :

- 2 Filter gaskets
- 2 NF check valves

#### > Standards & approvals :

- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Brass body in accordance with EN 1982, EN 12164, EN 12156

