


**Range:** PRESTORIZON - Range of Wall-Mounted Sensor Taps

**Ref:** 52041 - PRESTORIZON Single wall-mounted sensor tap with integrated electronics

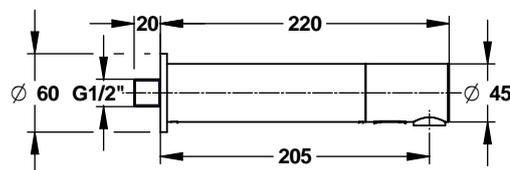

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 3 l/min with integrated flow regulator
- High quality anti-limescale aerator
- Anti-water-hammering design

#### > Hydraulic supply :

- G 1/2" (15x21)
- 1 1/2" integrated solenoid

#### > Power supply :

- 9V integrated lithium battery

#### > Material and colour finish :

- Body in brass with a nickel-chrome treatment
- Length of the spout: 220 mm
- Projection: 205 mm
- Diameter: 45 mm
- Diameter of the wall fixing rose: 60 mm

#### > Thermal resistance :

- Resistant to a temperature of 65°C for 30 minute thermal shocks

#### > Security :

- Anti-overflow security time is set to 30 seconds
- Autoflush: 45 sec every 24 hours after last use

#### > Delivered with :

- 1 Brass clamping nut, 1 Gasket and 1 Washer
- 1 wall fixing rose
- 1 Self-adhesive sticker and 1 Instruction manual

#### > Standards & approvals :

- ACS
- CE



**> CAUTION:**

- For proper operation, avoid installing the product facing reflective surfaces
- Do not use metal basin drain
- Install the product at 30 cm minimum from the basin bottom
- The product is delivered with the parameters mentioned in the technical data sheet. It is possible to modify these parameters with the remote control (ref. 90071)