



Range: PRESTO LINEA

Ref: 57116 - Wall-mounted single sensor tap, cross-partition, Mains 12-24V, 1,9l/min without stop valve

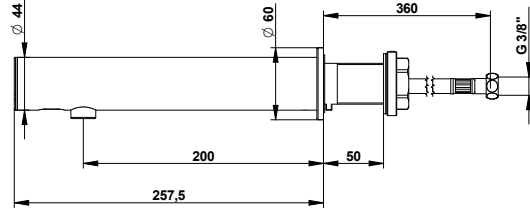

> Working pressure :

- 1 to 5 bar

> Function:

- Sensor trigger suitable for elderly, children and disabled people

> Flow :

- 1,9 l/min with integrated flow regulator
- High quality anti-limescale aerator

> Hydraulic supply :

- G 3/8" (12x17) hoses

> Power supply :

- Low voltage power supply (12-24V AC/DC) in IP65 waterproof external case (transformer 230V AC / 12-24V AC/DC unit not provided)
- Compatible with transformer 230 V AC / 12 V AC : Réf. 90464 / 90711/ 90610 / 90685 / 90704 / 90686

> Material and colour finish :

- Chrome-plated brass body with smooth inside body
- Chrome-plated molded metal cover

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
- Automatic shutdown of solenoid valve in case of power failure or sensor damage
- Duty flush 30 sec every 24h after last use (adjustable flow time and frequency)

> Installation

- Recommended installation height : 30 cm above the bottom of the washbasin

> Delivered with:

- 1 Brass clamping nut, 1 Gasket and 1 Washer
- 1 Wall rose
- 1 PEX Hoses with revolving nut and filter gasket
- 1 Self-adhesive sticker
- 1 extension cord 1m for power supply
- 1 Instruction manual

> Standards & approvals :

- Brass body in accordance with NF EN1982, EN12164, NF EN 12165,
- UBA list compliant
- 200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227

