


**Range:** PRESTO CHEF - Professionnal Kitchen range  
**Ref:** 70818 - Column –deck-mounted mixer – rinsing head

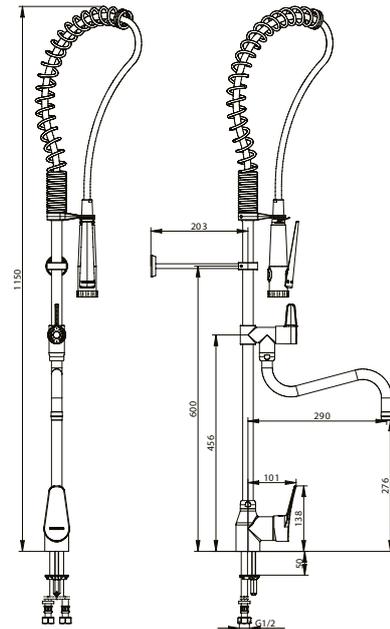

## > THE PRODUCT BENEFITS

- Resistant to intensive use
- Spring flexibility
- Ergonomic hand shower with continuous flow function, and gripping surface limiting the risk of burns. Tip to absorb shocks. Locking hook to avoid MSD (musculoskeletal disorder)
- Reinforced body / column interface
- Fast filling of tanks: 20L / min at 3 bar
- Robust mixing handle - possibility of installing it laterally
- Product design
- Adjustable wall support
- PU sheath shower hose to avoid bacterial niches and facilitate cleaning
- Ease of maintenance: availability of all spare parts

## > TECHNICAL SPECIFICATIONS

### > Model:

- Single-lever mixer with ceramic cartridge with flow rate of 20L / min at 3 bar
- 1/4 turn ceramic head tap with filling spout Lg 250 mm - adjustable
- Black M 1/2" hand shower with grip surface limiting the risk of burns. Flow regulated at 12L / min. user adjustable spray: concentrated or wetting. Anti-scale shower head. Locking hook for continuous flow. Integrated NF check valve.
- Guide spring for stainless steel hose
- Adjustable wall support, can be cut from 60 to 200 mm (from column to wall)
- Adjustable hand shower holder: left or right
- Interchangeable anti-tartar flow straightener

### > Recommended working pressure:

- 1 to 5 bars

### > Flow rate:

- 20L /min at 3 bar
- Hand shower: 12L /min at 3 bar

### > Hydraulic supply:

- G 1/2 " (15x 21)

### > Material and color of finish:

- Body, spout and column in chromed brass
- Injected metal hook
- Material compliant with the "UBA" list

### > Thermal resistance :

- Withstands a temperature of 75 ° C for 30 minutes (in the context of thermal shock).

### > Delivered with :

- 1 fixing bracket
- 2 PEX flexible hoses with stainless steel braided nut G1 / 2 " Lg 660 mm with non-return valves NF
- 1 filter
- 1 stainless steel braided hose (hand shower) Lg 1m surrounded by a PU sheath, resistant to temperatures up to 90 ° C. Continuous operating temperature at 70 ° C maximum

### > Standards and approvals:

- Chromed brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
- Nickel-Chrome surface treatment according to NF EN12540
- Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227

