


**Range:** PRESTOTEM 2

**Ref:** 88806 - Thermostatic shower panel with timed flow PRESTO 50 and reverser

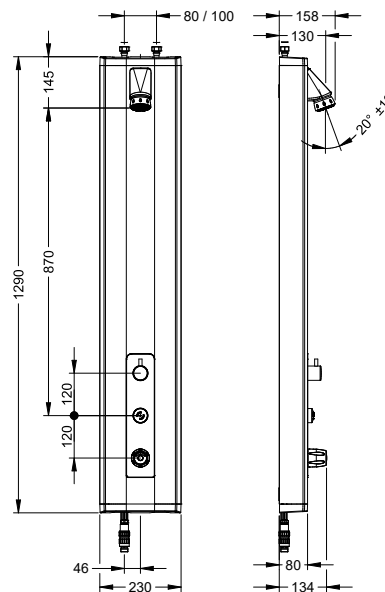

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 6 l/min with integrated flow limiter
- Fixed shower head with anti-limescale spikes
- Quick connector for hand-held shower

#### > Flow time :

- 30 seconds (± 5 sec.)

#### > Hydraulic supply :

- G 1/2" (15x21), top or rear water inlet. For rear water inlet, we recommend to add the adaptation kit under the reference 91026
- On P 50 tap NF II and thermostatic mixer tap EN 1111 (NF check valves)
- G 1/2" two-way reverser (shower head/hand-held shower reverser)

#### > Material :

- Anodised aluminum profile (2.5mm thickness)
- Aluminum removable valve plate, painted RAL 7005
- High resistance RAL 7005 coloured ABS casings

#### > Functioning:

- Wide opening panel without the need to dismantle from the wall and shower taps on a removable valve plate

#### > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security :

- Anti-scald system: flow is immediately stopped if the cold water is cut off
- Maximum delivered temperature : pre-fixed at 38°

#### > Delivered with :

- 1/2" hoses with revolving nuts
- MM 1/2" (15x21) straight stop valve and 250 micron filters
- Quick connector for hand-held shower
- Fastening screws and instruction manual

#### > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

