


**Range:** PRESTOTEM 2 PLP

**Ref:** 88852 - Thermostatic Legionella TOUCH shower panel, with hand-held shower

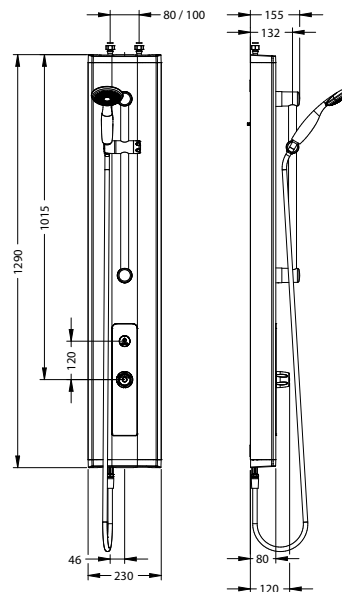

#### > Working pressure :

- 1 to 5 bar

#### > Flow rate :

- 10L/ min  $\pm$  10% at 3 Bar.
- Hand-held shower on rail with chrome plated slide

#### > Flow time:

- 30 seconds (adjustable from 1 sec to 5 min) and Start/Stop function
- Adjustable duration and frequency of the "duty flush" function (see mounting instruction)

#### > Hydraulic supply :

- G 1/2" (15x21), top or rear water inlet. For rear water inlet, we recommend to add the adaptation kit under the reference 91026.
- On two solenoid valves controlled by PRESTO TOUCH® tapware, then on a thermostatic mixing tap with EN 1111 cartridge (NF check valves)

#### > Power supply:

- Power supply by a remote control box (non-integrated, reference 88704)

#### > Material :

- Anodised aluminium extruded section (2.5mm thickness)
- Aluminium removable valve plate, painted RAL 7005 colour
- High resistance RAL 7005 coloured ABS covers

#### > Functioning:

- Wide opening panel without the need to dismantle from the wall and shower taps on a removable valve plate
- Possibility to parameter the periodical flushing : frequency or flow time

#### > Legionella version :

- Resistant to a temperature of 75°C during 30 minutes (for 20 cycles) in case of thermal shocks
- Patented By-pass system for 100% disinfection of all internal components via a remote control box for thermal shock trigger.

#### > The hand-held shower is not in compliant with thermal shock :

- The integrated hand-held shower should be replaced after a thermal shock. Different disposable hand-held showers are available for order under reference 75863/75864/75865/75866.

#### > Security :

- ANTI-SCALDING SAFETY : flow is immediately stopped if the cold water or hot water is cut off, compliant to French norm EN1111.
- Integrated temperature switch limiter, pre-fixed 38°C maximum.

#### > Delivered with :

- 1/2" hoses with turnable nuts
- MM 1/2" (15x21) straight stop valves and 250 micron filters
- Fastening screws and instruction manual

#### > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

