
TECHNICAL DATA SHEET



Range: Flush valve for rimless toilets bowls

Ref: 14260SB - PRESTO 1000 XL TC Induct mounting - Suitable for rimless toilets bowls



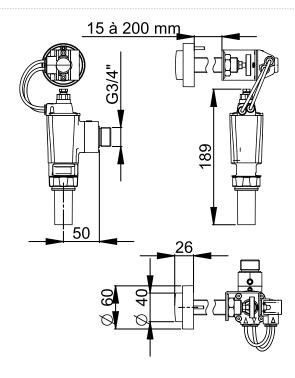

> Working pressure:

1 to 5 bar

> Volume of water delivered:

- Adjustable from 6 to 9l
- Anti-water-hammering design60l/min flow regulator

> Flow time:

Around 6 to 9 seconds

> Hydraulic supply:

- Inlet at 90°, M G 3/4" (20x27)
 Outlet connection on flush pipe Ø 28 mm

> Material and colour finish:

- Crude brass body and stop valve
 Remote control push button made in Brass chrome plated

> Security:

- Suitable for rimless toilets bowls of the market
 Anti-siphonic device
 Patented anti-blocking "S" system to avoid having continuous water flow even the push button is blocked in open position

> Delivered with:

- 1 Ball valve
 1 Remote control for induct mounting 15 to 200mm with clamping nuts
 1 PVC angled pipe
- 1 Nozzle1 Instruction manual

> Standards & approvals :

- Acoustic class II
 Brass body in accordance with EN 1982, EN 12164, EN 12165
 Molded chrome-plated body in accordance with EN 12540
 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227





