
TECHNICAL DATA SHEET



Range: Direct dual flush valve with adjustable volumes with brushed chrome-plated front plate Ref: 14300SB - PRESTO 1000 XL E DVA - Suitable for rimless toilets bowls



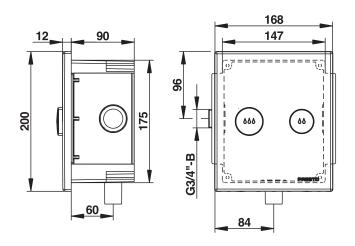

> Working pressure:

1 to 5 bar

> Discharge volume per flush:

- High volume: from 6 to 9 liters adjustable with wrench
 Low volume: from 2.5 to 5 liters adjustable by the slider on front plate
 Anti-water-hammering device
 60l/min flow regulator

> Flow time:

- High volume : 6 to 9 secondsLow volume : 2 to 5 seconds

> Hydraulic supply:

- Right or left square M G 3/4" (20x27)
 Outlet connection on flush pipe Ø 28 mm

> Material and colour finish:

- Brass body
 Brushed chrome-plated front plate with anti-fingerprint

- Suitable for rimless toilets bowls of the market, only with a PVC Presto flushing valve pipe in diameter 28 (References 47850 and 47871)
 Vacuum breaker device prevents the contamination of the water network from polluted water backflow
 Patented anti-blocking "S" system preventing the tap to be blocked in open position to avoid continued water flow

> Delivered with:

- 1 Concealed ABS case
 1 Brushed chromed -plated front plate
 1 Flush valve P1000XL type with integrated stop-valve
- 1 Instruction manual

> Standards & approvals:

- Brass body in accordance with EN 1982, EN 12164, EN 12165
 Nickel-Chrome plated according to EN12540
 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

















