
# **TECHNICAL DATA SHEET**



# Range: Direct dual flush valve with adjustable volumes with bright chrome-plated front plate Ref: 14301SB - PRESTO 1000 XL A DVA - Suitable for rimless toilets bowls



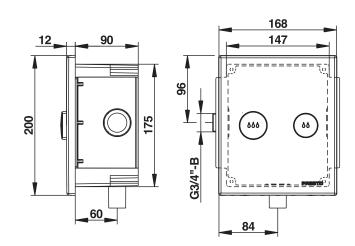

> Working pressure:

#### 1 to 5 bar

#### > Discharge volume per flush:

- High volume: from 6 to 9 litres adjustable with wrench
   Low volume: from 2.5 to 5 litres adjustable by the slider on front plate
   Anti-water-hammering device
   60/min flow regulator

#### > Flow time:

High volume: 6 to 9 seconds
Low volume: 2 to 5 seconds

## > Hydraulic supply:

- Right or left square M G 3/4" (20x27)
  Outlet connection on flush pipe Ø 28 mm

#### > Material and colour finish:

- Brass bodyBright chrome-plated front plate

## > Security:

- Suitable for rimless toilets bowls of the market, only with a PVC Presto flushing valve pipe in diameter 28 (References 47850 and 47871)
  Vacuum breaker device prevents the contamination of the water network from polluted water backflow
  Patented anti-blocking "S" system preventing the tap to be blocked in open position to avoid continued water flow

## > Delivered with:

- 1 Concealed ABS case 1 Bright chromed -plated front plate 1 Stop-valve
- 1 Instruction manual

## > Standards & approvals:

- Acoustic class II
   Brass body in accordance with EN 1982, EN 12164, EN 12165
   Nickel-Chrome plated according to EN12540
   200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

3/4



