
# **TECHNICAL DATA SHEET**



Range: PRESTO LINEA®

Ref: 57102 - Wall-mounted single sensor tap, all-integrated, battery, 1,9l/min Chrome



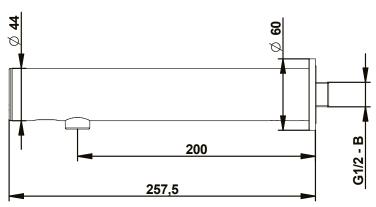

#### > Working pressure

1 to 5 bar

### > Function

- Starts and stops automatically by hand detection
   Sensor trigger suitable for PRM, elderly, children and disabled people

1.9l/min at 3 bar with integrated regulated flow spray

## > Hydraulic supply

- G 1/2" (15x21) Cold or premixed water
   Integrated stop valve

## > Power supply

• Integrated 3V CR123A lithium batteries (x2)

## > Material and colour finish

- External brass body: Chrome Finish
   Molded metal cover: Chrome Finish
   Internal lead-free brass body

#### > Thermal resistance

Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
  Automatic shutdown of solenoid valve in case of low battery or sensor damage
  Duty flush 30 sec every 24h after last use (adjustable flow time and frequency with PRESTOCOM toolkit: https://www.presto.fr/apropos/prestocom/)
  Smooth inner body for limiting biofilm binding and bacterial development
  Low battery alert (blinking led light)

#### > Installation

· Recommended installation hight: 30 cm above the bottom of the washbasin

### > Delivered with

- 1 wall rose1 Filter gasket1 Self-adhesive sticker1 Instruction manual

# > Standards & approvals

- Lead-free brass in accordance with NF EN1982, EN12164, NF EN 12165, 4MS, RoHS, Reach, NSF-372, UBA list compliant
  Dezincification compliant with ISO 6509 and NDZ
  200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227























