
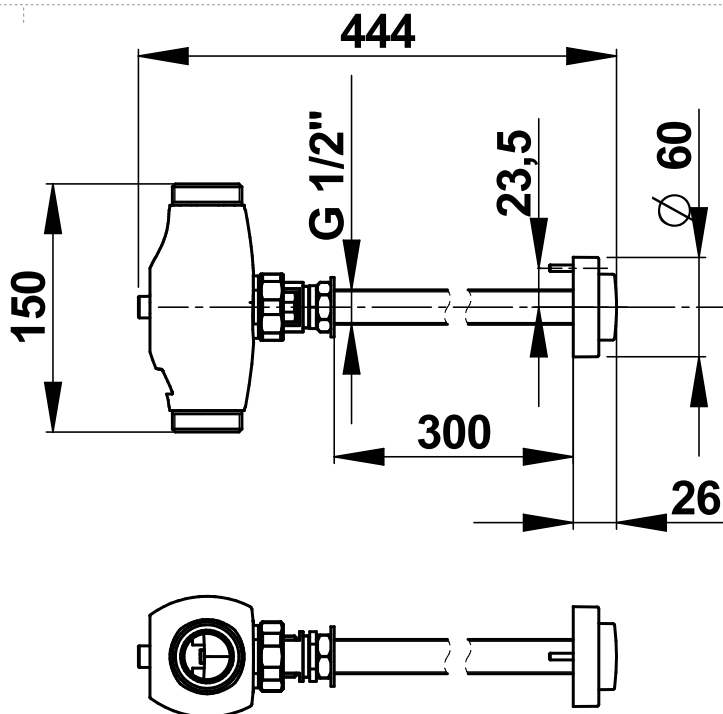


Range: Eclair XL

Ref: 13061 - Eclair XL Timed mechanical direct flush valve, partition kit 200-300 mm

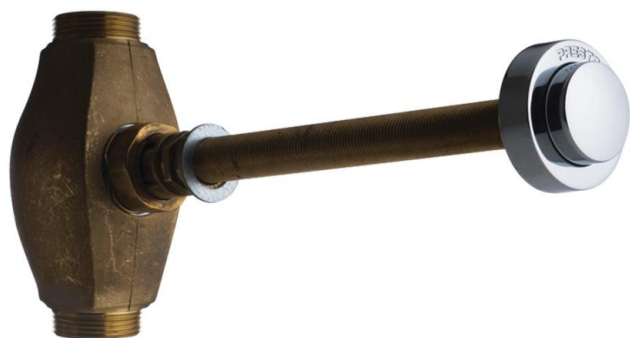

Recommended operating pressure:

- 1 to 5 bars

Operation:

- Triggering of flow by pressing push-button
- Automatic shut-off after timer

Flush volume:

- From 4l to 13l adjustable by action on the shut-off valve (at 1 bar dynamic)
- From 6l to 22l adjustable by action on the shut-off valve (at 3 bar dynamic)
- Anti-waterhammer device

Flow duration:

- 7 to 9 seconds

Hydraulic supply:

- In-line supply, double M G 1"1/4 (33x42)
- Outlet connection on Ø 32 mm flush tube

Material and color finish:

- Body and through-bulkhead control in raw brass
- Brass push-button, chrome finish

Safety:

- Anti-siphonic device: ensures protection of drinking water networks against possible upwelling of polluted water

Delivered with:

- 1 Ball shut-off valve
- 1 Through-wall control 200 to 300 mm
- 1 Flow fitting
- 1 PVC elbow tube
- 1 Junction nose

Standards / Approvals:

- Brass body compliant with NF EN1982 / NF EN12164 / NF EN12165
- Nickel-Chromium surface treatment to NF EN12540
- Neutral salt spray resistance (NSS): 200 h to NF ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

