


**Range:** SELF-SUPPORTING MOUNTING FRAME WITH DIRECT FLUSH VALVE

**Ref:** 18506SB - Self-supporting mounting frame with PRESTO 7100 XL N 2-4L - Suitable for rimless toilets bowls

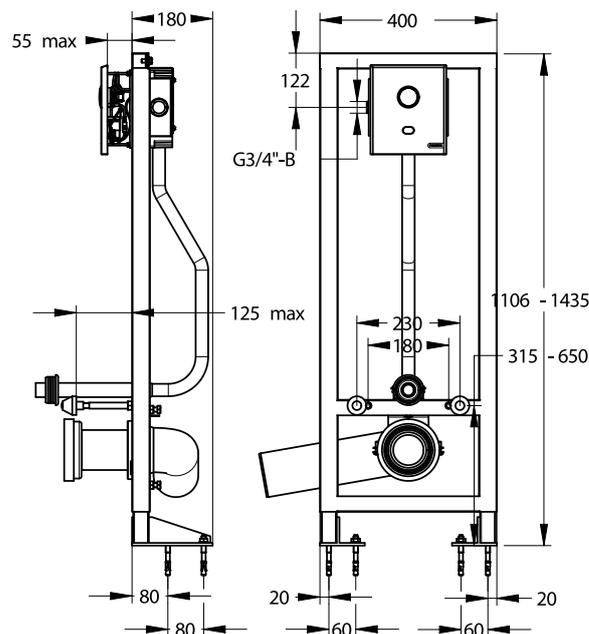

#### > Working pressure :

- 1 to 5 bar dynamic

#### > Volume of water delivered (adjustable on request through PRESTO setting tool):

- Pre-fixed at 4 liters at 2,5 bar dynamic pressure (+/-1)
- Anti-water-hammering device
- 60l/min flow regulator

#### > Flow time :

- 4 seconds ( the parameters can be adjusted via PRESTO programming tool)

#### > Operation :

- Double flush volume automatic detection depending on the time of user presence (2 or 4l - short/long detection)
- By pass manual 4l push button (flush can be activated in case of power failure)

#### > Power supply :

- With mains 7V via 12V / 24V AC or DC. Compatible with 230 V AC / 12 V AC transformer not included ( See Ref. 90464 / 90711/ 90610 / 90685 / 90704 / 90686).

#### > Hydraulic supply :

- On PRESTO 1000 XL tap with 3/4" (20x27) integrated stop valve
- Outlet connection on flush pipe Ø 28 mm

#### > Material and colour finish :

- 60 micron epoxy coated soldered steel mounting frame
- Galvanized legs and floor fixing plates
- Brass body flush valve
- Anti-vandal brushed stainless steel 304L front plate

#### > Security :

- Suitable for rimless toilets bowls of the market
- Vacuum breaker device prevents the contamination of the water network from polluted water backflow
- Patented anti-blocking "S" system to avoid the water to flow continuously
- The solenoid valve will be closed automatically in case of low battery or any damage of detector

#### > Delivered with :

- 1 Flush valve with stop valve integrated
- 1 Brass coupling nut Male Female 3/4" (20x27)
- 1 PVC angle tube Ø 32 mm and 1 junction nozzle male 55 mm
- 1 Extended straight PE tube 100 mm with adapter sleeve for connection to the bowl
- 1 WC outlet angle PVC pipe dia. 100 mm
- Screw and dowel for toilet bowl fixing

#### > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

