


Range : Simple tap for ceiling shower

Ref : 27200 - PRESTO DL 350 S

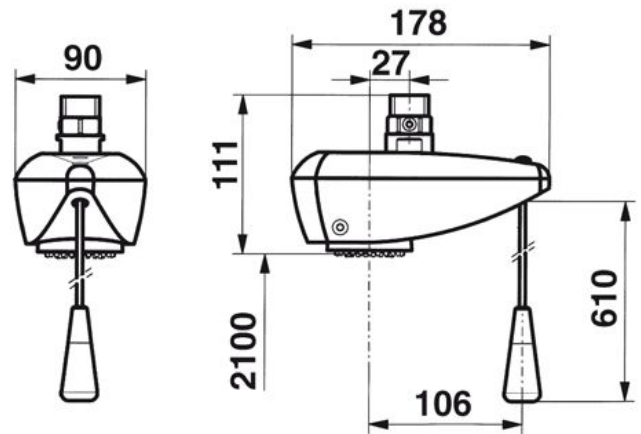

> Working pressure :

- 1 to 5 bar

> Flow :

- 10 l/min at 3 bar with internal flow regulator
- Anti-water-hammering design

> Flow time :

- 30 seconds (± 5 sec.)

> Hydraulic supply :

- G 3/4" (20x27) Top water supply with stop valve

> Material and colour finish :

- Brass body and components with molded chrome treatment
- Grey body RAL 7012

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Anti hanging security device

> Delivered with :

- Stop valve M 3/4" and gasket

> Standards & approvals :

- Acoustic class I
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227