


Range:

Ref: 27435 -

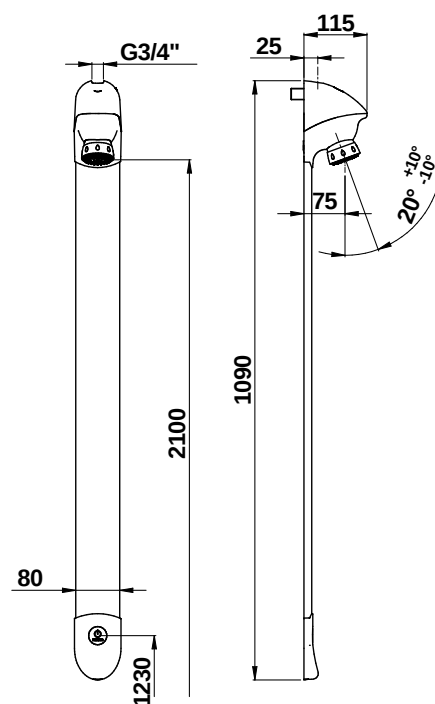

> Working pressure :

- 1 to 5 bar

> Flow :

- 6 l/min at 3 bar with integrated flow limiter
- Anti-water-hammering design
- Fixed shower head with anti-limescale spikes

> Flow time :

- 30 seconds (Adjustable from 1 sec to 5 min) and Start/Stop function
- Adjustable duration and frequency of the "duty flush" function

> Hydraulic supply :

- G 3/4" (20x27) par le haut
- For cold or premixed water

> Material and colour finish :

- Injected molded metal body and cover
- Profile extruded in aluminium-magnesium-silicon alloy 6060

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Anti-blocking system preventing the water to flow continuously

> Delivered with :

- VBA screws and nylon plugs
- Filter gasket

> Standards & approvals :

- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227