


Range: DL 400 SE

Ref: 27484 - DL 400 SE timed-flow shower, concealed with ceiling head, with stop valve

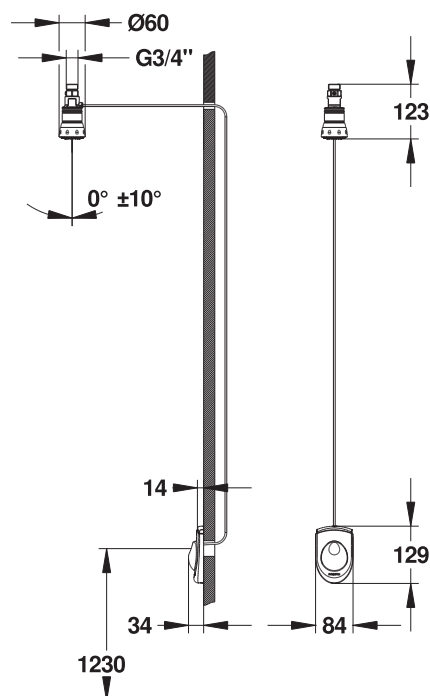

Functionality:

- Flexible mechanical release suitable for PMR, children and the elderly

Recommended operating pressure:

- 1 to 5 bars

Flow rate:

- 6 l/min at 3 bars via integrated flow regulator
- Anti-waterhammer device
- Fixed shower head with adjustable grid and anti-scale pimples

Flow duration:

- 30 seconds (-10/+5 s.)

Hydraulic supply:

- M G 3/4" (20x27) from top on telescopic straight male shut-off valve

Finish material(s) and color(s):

- Injection-molded metal body
- Extruded Aluminum-Magnesium-Silicon 6060 alloy profile
- Metal control, chrome finish

Heat resistance:

- This valve withstands a temperature of 75°C for 30 minutes in thermal shock conditions

Safety:

- System S® prevents blockage in continuous flow

Standards:

- Nickel-chromium surface treatment to NF EN12540
- Neutral salt spray resistance (NSS): 200 h to NF ISO 9227