


Range: Concealed dual control tap for wash basin

Ref: 30212 - PRESTO Dual control tap, anti-blocking

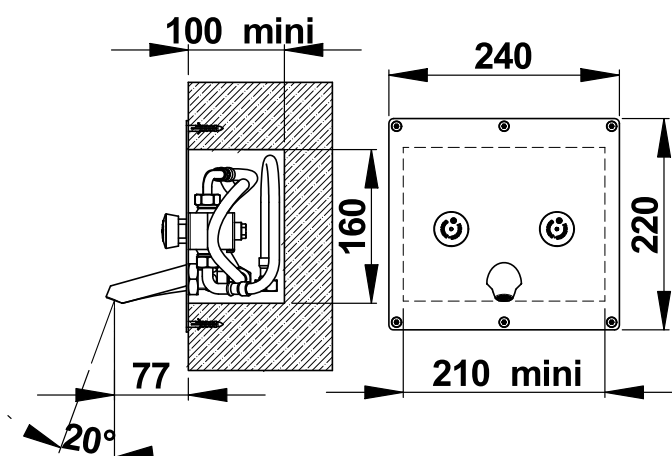

> Working pressure :

- 1 to 5 bar

> Flow :

- 3 l/min at 3 bar - 4-positions flow adjustment device
- Anti-water-hammering design

> Flow time :

- 15 seconds (± 5 sec.)

> Hydraulic supply :

- M G 1/2" (15x21) for each of the 2 taps. Cold – hot – premixed water

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Interchangeable heads and anti-rotation push-buttons preventing premature wear off
- Non-removable, wear-proof coloured marker

> Delivered with :

- 6 vandal proof screws for fixing the front plate
- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227