
# **TECHNICAL DATA SHEET**



**Range:** Knee operated taps for washbasin **Ref:** 31646 - PRESTO 712 Knee operated tap



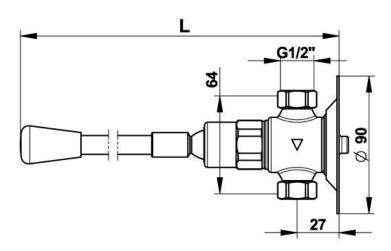

## > Working pressure :

1 to 5 bar

#### > Flow:

- 3 l/min at 3 bar 4-positions flow adjustment device
- Anti-water-hammering design

## > Flow time:

15 seconds (± 5 sec.)

#### > Operation:

Knee operated through action on the omnidirectional control (flexible trigger)

### > Hydraulic supply:

- Either with hot, cold or mixed temperature water.
- MG ½ (15x21) Inlet and outlet

#### > Thermal resistance :

Resistant to a temperature of 75°C for 30-minute-thermal-shocks

## > Security:

Non-removable, wear-proof red or blue marker

# > Delivered with:

- 1 Gasket nut
- 1 Coupling nut
- 1 non return valve
- 2 colored marker (Red and blue)
- 1 Nut for 12x14 tube
- Instruction manual

# > Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

















This document is not contractual. We reserve the right to modify the characteristics of our products without notice in advance. All our brands and models are registered trade marks.