


Range: Kit PRESTO 512 S

Ref: 31671 - Wall-mounted timed-flow tap cross-partition for washbasin

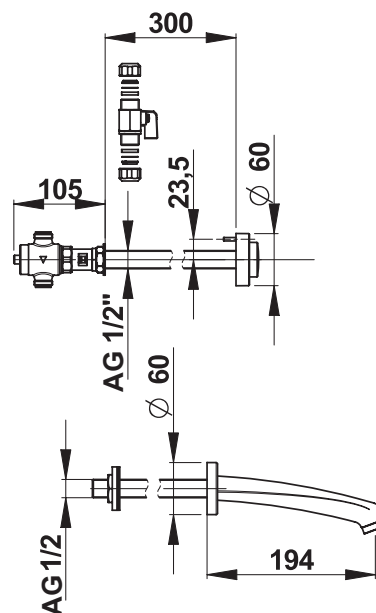

> Working pressure :

- 1 to 5 bar

> Flow :

- 6 l/min at 3 bar - 4-positions flow adjustment device
- Anti-water-hammering design

> Flow time :

- 15 seconds (± 5 sec.)

> Hydraulic supply :

- In-line water inlet
- M G 1/2" (15x21) inlet and outlet
- Cold water

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously
- Vandal-proof product

> Delivered with :

- 1 Cross-partition control (200 to 300 mm thick)
- 1 Bec mural long (fixation anti-rotation) 194 mm
- 1 Closing tap with S anti-blocking system
- 1 Robinet d'arrêt M 1/2" (15x21) / M 1/2" (15x21) avec/ raccords rapides pour cuivre de 12x14 mm /

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

