
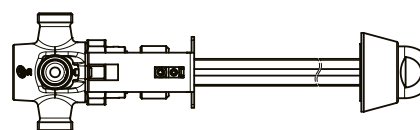


Range: Alpa

Ref: 35020 - Alpa timed shower mixer, cross-partition, 220mm

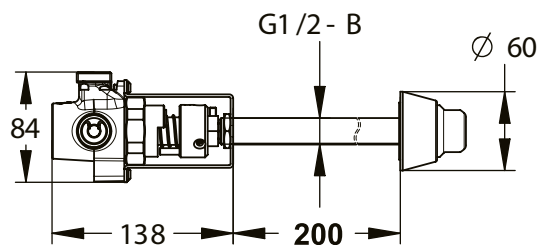

Working pressure :

- 1 to 5 bar

Flow :

- 6 l/min at 3 bar with integrated flow regulator
- Water hammer prevention device

Flow duration:

- 20 to 35 seconds

Hydraulic supply:

- Inlet M G 3/4" (20x27) for cold water, hot water, and outlet
- Integrated NF check valves

Material and finishing color:

- Solid chrome-plated brass body
- Button and casing in solid brass, machined, chrome-plated
- Wall passage diameter G1/2, adjustable and re-cuttable by the manager
- Mounting plate in stainless steel 304

Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

Safety:

- Maximum temperature limitation by adjustable stop (by the manager)

Delivered with:

- 2 filter seals
- 1 through-wall control 10 to 220 mm
- 1 single-lever mixer tap ALPA
- 1 manual

Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
- Nickel-Chrome surface treatment according to NF EN12540
- Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227