
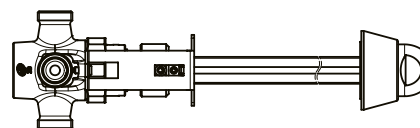


**Range:** PRESTO ALPA® NTC

**Ref:** 35026 - Timed-flow wall-mounted single lever mixer for shower, 6l/min, partition 100mm, antiblocking S®

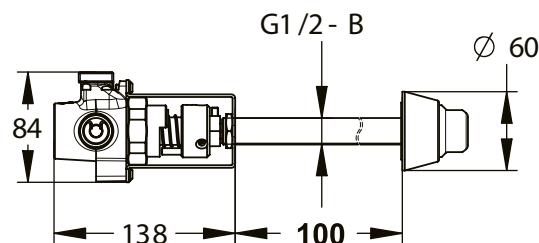

## > Recommended Working pressure:

- 1 to 5 bar

## > Flow:

- 6l/min at 3 bar with integrated flow regulator
- Water hammer prevention device

## > Flow duration:

- 20 to 35 seconds

## > Hydraulic supply:

- Inlet M G 3/4" (20x27) for cold water, hot water, and outlet
- Integrated NF check valves

## > Material and finishing color:

- Solid chrome-plated brass body
- Button and casing in solid brass, machined, chrome-plated
- Wall passage diameter G1/2, adjustable and re-cuttable by the manager
- Mounting plate in stainless steel 304

## > Thermal resistance:

- This faucet can withstand a temperature of 75°C for 30 minutes within the scope of thermal shocks.

## > Safety:

- Maximum temperature limitation by adjustable stop (by the manager)
- S® safety system preventing continuous flow blocking

## > Supplied with:

- 2 filter seals
- 1 through-wall control 10 to 100 mm
- 1 single-lever mixer tap ALPA
- 1 manual

## > Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
- Nickel-Chrome surface treatment according to NF EN12540
- Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227