
TECHNICAL DATA SHEET

PRESTO®

Range: Self-Closing urinal valves Ref: 38336 - PRESTO 120 B



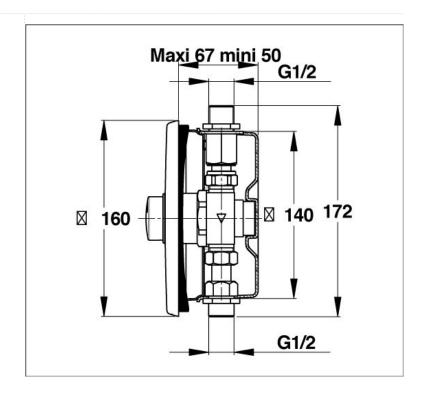

> Working pressure :

1 to 5 bar

> Flow:

- 5 l/min at 1 to 10 bar 4-position flow adjustment device
- Anti-water-hammering design

> Flow time:

6 seconds (± 2 sec.)

> Hydraulic supply : • In-line water inlet

- M G 1/2" Inlet and outlet

> Material and colour finish:

160x160 stainless steel vandal proof front, brushed finish

> Delivered with:

- 1 Flush-mounting case
- 1 Vandal-proof rose 160x160 (Brushed stainless steel)
- 1 Stop valve MF G 1/2" (15x21)
- 1 Douille lisse MF G 1/2" (15x21)
- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227











